

## Manufactured Housing Product Protection Plan

The NORDYNE Manufactured Housing Product Protection Plan is a program that may be purchased by the consumer through a NORDYNE distributor and their installing dealers and/or service companies.

The program covers NORDYNE Manufactured Housing products and extends a specified coverage to certain equipment beyond the terms of the limited warranty. Each plan is subject to the provisions as stated in the plan.

The plan is to be sold within 1 year of installation date of the equipment being covered in the plan. Protection plans will not cover prior warranty labor claims. All existing warranties remain in effect.

### 100145 Four-Year Compressor Warranty

## Five-Year Parts & Labor Protection Plans

- 100142 Furnace
- 100143 Split System A/C Condensing Units\* & Packaged A/C
- 100144 Split System H/P Condensing Units\* & Packaged H/P
- 100146 Gas/Electric Package Units
- 100147 Furnace & A/C (Split or Packaged)
- 100148 Furnace & Heat Pump (Split or Packaged)

## Ten-Year Parts & Labor Protection Plans

- 100149 Split System A/C Condensing Units\*
- 100150 Split System H/P Condensing Units\*
- 100151 Packaged A/C
- 100152 Packaged H/P
- 100153 Gas/Electric Package Units
- 100154 Furnace
- 100155 Furnace & A/C (Split or Packaged)
- 100156 Furnace & Heat Pump (Split or Packaged)

\*The Nordyne evaporator coil is covered when installed at the same time as condensing unit.

### **SPECIAL NOTE:**

The plan starts upon acceptance by NORDYNE and continues up to the end of the plan from the original date of installation of product included in this plan.

Parts will be replaced from your authorized NORDYNE distributor for the length of the program.


# Thermostats

Robertshaw  
**UNI-LINE**  
NORTH AMERICA


## Heating T-Stat with Thermometer

Economical 24 volt, wall-mounting heat-only thermostat with setting range of 50° to 90°F, 10° to 30°C with nominal 2°F differential. 2 wire, mercury free, environmentally safe. Bimetal sensor with an open contact switch that is enclosed for dust protection, allowing thermostat to be quickly installed without the critical leveling necessary with other thermostats. 3-1/6" square, 1-1/4" deep. Heat anticipation range of .18 to 1.0 amp.

**237801** 100-401; 100/Ctn.

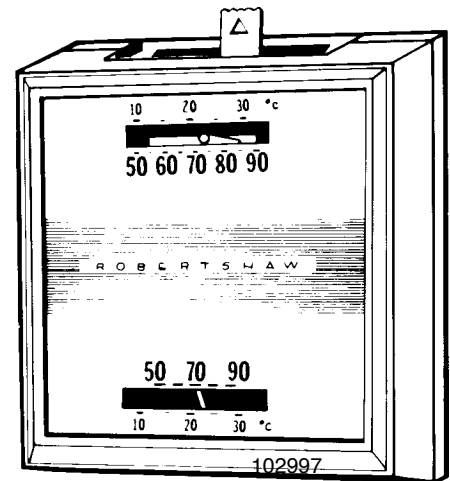

## Deluxe Electric Thermostat



Vertical mount, 24 VAC 1H/1C gas/electric compatible; millivolt compatible. .02 to 1.6 amps heat anticipation, bi-metallic temperature indicator. System and fan switch. J-Box compatible. O and B terminals. Mercury free, mechanical.

**103000** 9200V



## Heating Thermostat

Heat only, no thermometer.

**238129**


## Heat & Cool Thermostat

Low voltage, 24 VAC (30 VAC max.). .015 to 1.2 amps heating, 0 to 1.5 amps cooling. Snap action switch. Heating anticipator rating adjustable from 0.15 to 1.2 amps. Cooling anticipator rating fixed. 50°F to 90°F, 10°C to 30°C.


**103001** Thermostat

**103002** Subbase Only

(replacement only; will not work with 238129)

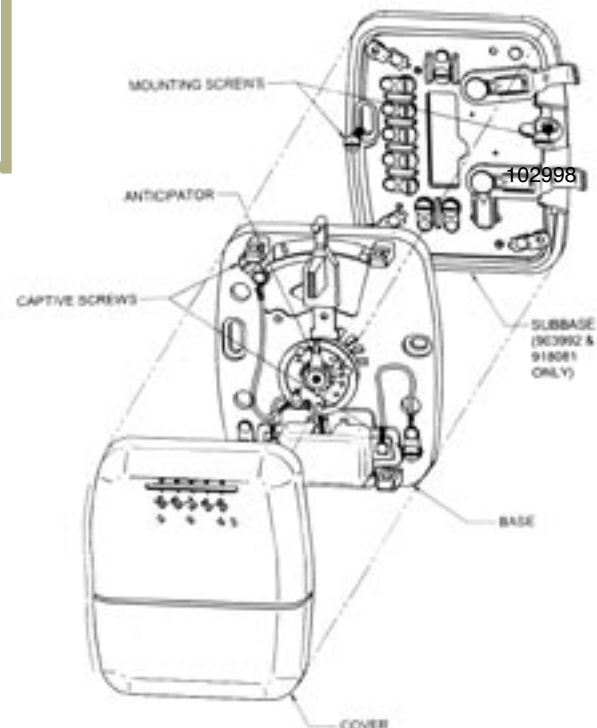

## GE Thermostats

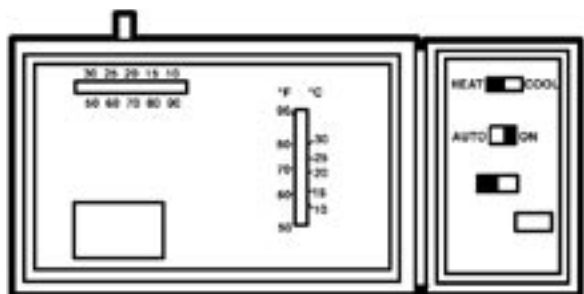

Range 50° to 90° on heating and cooling cycle with differential of 2°F. 6.3" x 2.75" x 1.72". Mercury switches 1.5 amps at 24 volts. Slide switches 2 amps at 24 volts.

**103003** 914831 Heat/Cool (Miller)

**103004** 914832 Heat Pump (Miller)

## Nordyne "E" Thermostat

Digital, non-programmable, cost-efficient. Wall-mount. Low voltage. Batteries are not required. Temperature and mode settings are preserved with the power off.

**102995** Heat & Cool (917432)

**102996** Heat Only (917433)



## SAVERSTAT® Programmable Electronic T-Stat



For single stage heating & A/C systems with 24V controls. Standard "AA" battery included. One-button programming & hotline for technical assistance. Meets or exceeds all state/federal laws/guidelines requiring automatic setback thermostats. No subbases to stock or install. Large memory. Automatic compressor short-cycle protection. Four time and temp changes per weekday, 2 per weekend day.


**102998** For A/C; 24/Ctn.

**102997** F/Heat Pump; 24/Ctn.



102998

## Non-Metallic Sheathed Cable




- Uncoated copper conductors ASTM B-3
- Insulation Cresin-90 PVC compound, color-coded
- Two conductors are laid parallel with ground wire and paper separator
- Three conductors are twisted with cable fillers with wrapped ground wire to form round core
- Smooth 30 mil PVC jacket overall

Materials, test and construction in accordance with ANSI/UL 719 and Federal Specification J-C-30A.

**220425** 8-2 NM w/Ground, 125'  
**220427** 12-2 NM w/Ground, 250'  
**220424** 10-2 NM w/Ground, 250'

## Underground Feeder Cable



- Solid copper 2 or 3 conductors
- 90° PVC insulation, color coded, insulated conductors and bare ground laid parallel
- 600 Volts
- Sunlight resistant PVC jacket compound

Materials, test and construction in accordance with ANSI/UL 493 and Federal Specification J-C-30A.

**220426**  
 10-2 UF w/Ground, 250'


## Liquidtite Flexible Non-Metallic Conduit



For electrical applications outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut conduit is impact resistant, chemical resistant and will not kink or fracture.

**220408** 1/2" x 100' Roll  
**220432** 3/4" x 100' Roll

## Non-Metallic Liquidtite Fittings

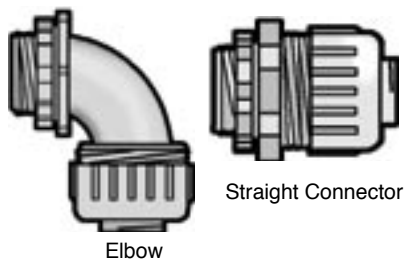


Straight Connector

Elbow

For use with non-metallic liquid tight conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulls through.

**220431** 1/2" Elbow, Plastic  
**220434** 3/4" Elbow, Plastic  
**220430** 1/2" Straight Connector, Plastic  
**220433** 3/4" Straight Connector, Plastic

## PVC Conduit



**220440** 1/2" x 10"  
**220441** 3/4" x 10"

## PVC Condensate P-Trap



**100545** 3/4"

## Ultra Whips – Convenience Kit

Quick wiring in three distinct colors for easy A/C hook-up. 90-degree connector is removable for straight connections (Straight connector not included). 1/2" x 4' THHN wire. Non-metallic connectors.

**220405** 10 Gauge; 6/Ctn.  
**220410** 8 Gauge; 6/Ctn.



Prices and Specifications Subject to Change without Notice




## Slimfold Furnace Door


Single panel, full-louvered doors. White finish is electrostatically applied, baked-on enamel. No jamb required. Welded on hinge. Comes with hinges, screws and knob.

	Door Width	Door Height	Finished Opening Size	Free Air Space
<b>211990</b>	20"	78.5"	20.5" x 80.5"	238 Sq. In.
<b>211991</b>	22"	78.5"	22.5" x 80.5"	257 Sq. In.
<b>211992</b>	24"	78.5"	24.5" x 80.5"	261 Sq. In.

## Fiberglass Filters



- 103131** 16" x 20" Hog Hair; 100/Ctn.  
**238175** 20" x 20"; 12/Ctn.  
**231287** Rolled Foam (fits 24" x 25" x 1/4")  
**103035** 17" x 18" x 1/4" A/C Filter



## Filters & Retainers

- 100598** Electric Furnace Filter 24" x 27" (Nordyne #917763)  
**238173** Filter 1/4" x 16" x 26" F/CMF & CMH Miller furnaces. (Miller #102957040)  
**238169** Retainer f/CMF Filter  
**238171** Filter 1/4" x 19" x 36" F/Amm Coleman President II (Coleman #7660-3401)  
**238172** Retainer f/Coleman Filter  
**231283** Filter 1/4" x 19" x 54" F/all Intertherm/Miller MGH Series (Nordyne #6683560)  
**238170** Retainer f/F-30 Filter, Intertherm & Miller 'MGH' furnace 75 pcs./carton, needs 3 for ea. filter. 238174 Filter Kit  
**238174** Filter & Retainer Kit: 1/4" x 19" x 54" filter & 3 retainers. Fits all Intertherm & Miller MGH' series (Nordyne #9009220)  
**231284** Filter for M2RL 18" x 20" x 1  
**231288** MAC Sock Filter  
**238167** E2EB-B (Nordyne #668934) (w/out A/Coil installed)



## A/C Mounting Brackets

Heavy duty, 1/8" thick steel perfect for hanging condensers and heat pumps outside of home. Can be mounted to any height to allow for easy maintenance underneath unit. No longer a need to wait for finished grade or landscaping prior to installing A/C. Pre-punched holes for easy installation. Powder coated gray finish.



- 100520** 36" Pair



## Cartridge Fuses

Made with Rosin core solder. 250 volts. UL listed. 10 per box. 60 Amp; 50/Ctn.

**221006**

## Non Tamp Fuse




Base shape prevents insertion of wrong ampage. Thermal element provides time lag temporary overload by starting of appliance motors. Regular short-circuit protection. 4 per box.

- 220801** 15 Amp; 125/Ctn.  
**220802** 20 Amp; 125/Ctn.



# Circuit Breakers

**IMPORTANT NOTE:**  
In accordance with the National Fire and Safety Acts of 1990, all breakers must match the original manufacturer of the panel that the breaker will be used in. We do not assume any responsibility for installation of any electrical apparatus or the guarantee of the product.



All breakers listed are 240V AC, UL listed, C.S.A. approved.




Size	# of Poles	AMP	GE	Square D	Westinghouse	Classified Cutler-Hammer	Cutler-Hammer
1"	1	15	220915	220977		220502	
1"	1	20	220916	220982		220503	
1"	1	30	220917			220504	
2"	2	20	220904	220979		220505	220510
2"	2	30	220905	220980	220990	220506	220512
2"	2	40	220906	220981		220507	220513
2"	2	30/20					220520
2"	2	30/40			220992		
2"	2	50	220907	220983			
2"	2	60		220984			
2"	2	100	220908				

## G.E. Half Sizes


- 220925 1/2", 1P/15 Amp
- 220926 1/2", 1P/20 Amp
- 220927 1/2", 1P/30 Amp
- 220928 1/2", 1P/40 Amp
- 220930 1", 2P/30 Amp
- 220931 1", 2P/40 Amp

**Cutler-Hammer UL Classified Circuit Breakers fit virtually any panel;** for more information on the meaning of various breaker designations, please refer to H-15 of this catalog.

## Homeline Circuit Breakers




10,000 Amperes RMS — UL listed Interrupting Rating 120/240Vac. 15-30 Ampere breakers are suitable for use with 60°C or 75°C conductors. 40-125 Ampere breakers are suitable for use with 75°C conductors.



- 220977 15 Amp, 1 Pole ◆▲
- 220982 20 Amp, 1 Pole ◆▲
- 220979 20 Amp, 2 Pole, Common Trip ◆
- 220980 30 Amp, 2 Pole, Common Trip ◆
- 220981 40 Amp, 2 Pole, Common Trip ◆
- 220983 50 Amp, 2 Pole, Common Trip ◆
- 220984 60 Amp, 2 Pole, Common Trip ◆

- ◆ UL listed as SWD (switching duty) rated. Suitable for 120VAC fluorescent lighting loads.
- ▲ UL listed as HACR type for use with air conditioning, heating and refrigeration equipment having motor group combinations and marked for use with HACR type circuit breakers.


## Homeline Tandem Circuit Breakers



10,000 AIR — One Pole Tandem 120/240Vac (one space required). 15-20 Ampere one pole tandem breakers are suitable for use with 60°C or 75°C conductors. 15-30 Ampere two pole tandem breakers are suitable for use with 75°C conductors.

- 220989 15 and 20 Amp
- 220978 20 and 20 Amp
- 220993 30 and 15 Amp

## Homeline Quad Tandem Circuit Breakers



10,000 AIR — Two Pole Tandem 120/240Vac (two spaces required). Represents two 1-pole outer poles and one 2-pole inner breaker with common trip. 15-20 Ampere one pole tandem breakers are suitable for use with 60°C or 75°C conductors. 15-30 Ampere two pole tandem breakers are suitable for use with 75°C conductors.

- 220986 Two 20 Amp 1 Pole, 30A 2 Pole
- 220987 Two 20 Amp 1 Pole, 40A 2 Pole
- 220988 Two 20 Amp 1 Pole, 50A 2 Pole

# Disconnect Switches




## Pull-Out Style Disconnect Switches

Not-fusible and fusible, NEMA TYPE 3R — Outdoor 240Vac, Single-phase, 2 wire with ground. Convenient combination knockout provisions on the side, back and bottom for maximum flexibility. Side-hinged doors for easy access and installation. Positive pull-out head contact for a durable, long-lasting electrical connection. Pull-out head storages in "OFF" position. Mounting slot for prehanging during installation. Metallic style is rugged, long-life galvaneal steel with power coat. Non-metallic is made of durable polymer for long-lasting protection against harsh elements.




METALLIC					
Part #	Description	HP Max	Line	Load	Equip. Grounding Terminals Al/Cu
<b>220406</b>	60 Amp, Not-Fusible	10	#14-#3	#14-#3	(2) #14-#4
<b>220407</b>	30 Amp, Fusible	3	#14-#3	#14-#6	(2) #14-#4
<b>220404</b>	60 Amp, Fusible	10	#14-#3	#14-#3	(2) #14-#4

### METALLIC



NON-METALLIC					
Part #	Description	HP Max	Line	Load	Equip. Grounding Terminals Al/Cu
<b>220400</b>	60 Amp, Fusible <sup>1</sup>	10	#14-#3	#14-#3	(6) #14-#4
<b>220409</b>	60 Amp, Not-Fusible <sup>2</sup>	3	#14-#3	#14-#3	(6) #14-#4

### NON-METALLIC

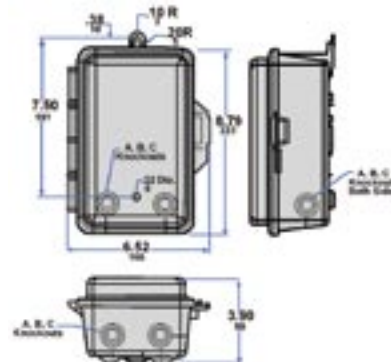

<sup>1</sup> Suitable for use on systems with up to 10K RMS symmetrical amperes available fault current at 240 VAC.


<sup>2</sup> Does not contain overcurrent protection. Suitable for use on systems with up to 10K RMS symmetrical amperes available fault current at 240 Vac when protected by a fuse or circuit breaker rated 60 Amperes or less.

## Cutler-Hammer Non-Fused Pull-Out Style Disconnect Switches

**NEW!**

- ON/OFF control provided by pullout handle
- Pullout handle can be conveniently stored in the compartment in the OFF position, helping to prevent the handle from being misplaced.
- Protective shield cannot be removed until the pullout handle is removed, disconnecting the power.

**220500** 60 Amp Non-Fused Metal

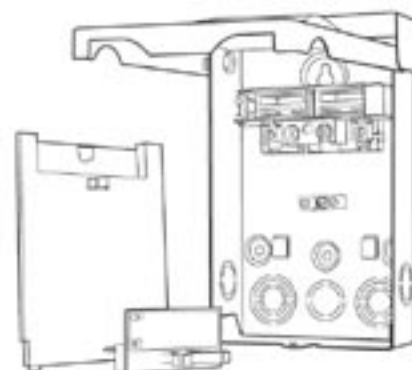


## Thermostat Wire



20 Gauge. UL Listed.

- 220308** 2 Wire; 500'
- 220311** 3 Wire; 500'
- 220310** 5 Wire; 250'
- 220313** 8 Wire; 250'

## Thermocouples



Fully universal, fits push-in, screw-in or clamp-on type pilot burners.

- 232501** 18"; 24/Ctn.
- 232502** 24"; 24/Ctn.
- 232503** 30"; 24/Ctn.
- 231350** 24"; 10/Ctn. (Nordyne)
- 231351** 18"; 10/Ctn. (Nordyne)

## Extend-A-Match




Retracts to 5" long. Chrome plated brass. Matches insert in the spring loaded jaws. Packaged in attractive skin pack.

- 250125** 12/Ctn.

# FLEXIBLE GAS CONNECTORS



## 1" Supr-Safe Stainless Steel Gas Connectors

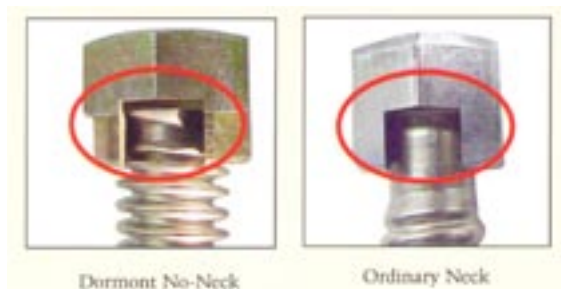


Dormont's exclusive No-Neck design eliminates the danger of stress cracks in connectors where the straight tubing of the neck enters the nut.

As the inventor of the stainless steel gas connector with over 50 years of proven field experience, Dormont is the most trusted name in gas connectors. AGA listed for both outdoor and indoor use. Annealed 304 stainless steel, PVC coated.



1" OD (3/4" ID) with 3/4" FPT x 3/4" MPT.


- 250812** 24"
- 250814** 30"
- 250811** 36"




Gas Pack/Rooftop HVAC



Meter



Manufactured (Mobile) Home



Furnace



Commercial Water Heater



## HVAC Duct Tape

Meets UL 181B-FX for duct installations with HVAC equipment.

**360450** 2" x 60 Yards



## Fin Tool

Straightens even the most severely damaged fins. Heavy-duty spring wire bristles adjust to all settings. Tension adjustment band allows maximum rigidity. Works on all units.

**380028**



## Gas Shut-Off Valve




Female Pipe  
to Female Pipe

**161039** 1/2" FPT x 1/2" FPT

Robertshaw  
**UNI-LINE**  
NORTH AMERICA

## Gas Heating Valve


24V model used with a constant pilot. Pressure regulator. 3/4" FPT Inlet. 3/4" FPT outlet. Side outlet 1/2" FPT w/plugs. 150,000 capacity. Includes one 1/2" x 3/8" reducer bushing.



**231337**

## Draft Cap

Removable, no down draft. Keeps wind and rain out of smoke pipe, yet allows fuel gases to vent. UL listed for 4" and 5" flue. Stainless steel.



**425202** 5" 8/ctn.

**425208** 4" 8/ctn.


## Coil & Fin Cleaner

Water-based, foaming, powerful blast spray. Convenient, easy-to-use, non-toxic, non-flammable and non-irritating cleaner degreases air conditioners and refrigeration equipment to ensure efficient operation; helps prevent overheating and motor burnout due to accumulated dust, air and grease in air spaces. Excellent vertical hold which liquifies and drains within minutes. Use on heat pumps, air conditioners, refrigerators, automobile radiators and cooling units. 20 oz.



**181375** 12/Ctn.

## Fill Alarm & Tank Gauge

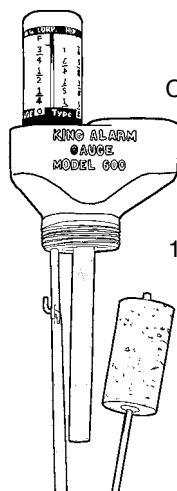

Complete unit—no assembly—remove from box, screw it to tank. Gray iron, corrosion-resistant finish. Bottom/male: 2". Top/female: 1-1/4". Weight: 2-1/2 lb. Vertical or horizontal applications.

**230675** Vertical

**230676** Horizontal

## #6 Mastic Air Duct Sealant

Low to high velocity, non-toxic adhesive-sealant for permanently sealing fabricated joints and seams of sheet metal air ducts, UL-181 listed rigid fiberglass air ducts, UL-181 listed flexible air ducts and thermal insulation. Ideal for repairing damaged and leaking air ducts and sealing conditioned spaces from air infiltration. Waterbased, non-flammable, high solids content, fiber reinforced, excellent longevity (actually strengthens with age), fire/mold/mildew resistant, weatherproof, elastomeric. Easy to apply and clean up.



**110500** 2 Gallons

**110501** 1 Gallon


## Tank Bushing



Machine-cast in durable Zamac for two-line suction & return installations. Bottom-tapped for solid stub or suction line guide; 1-piece nut and ferrule for easy installation. 2" x 3/8" x 3/8"; 24/Ctn.

**230670**

## MPT Fill Box



For kerosene drums and skid tanks where auxiliary vents are not required. Vented overlapping top keeps out moisture; locking hasp adds protection. Heavy cast iron; 1-1/2 lbs. 24/Ctn.

**230671** 2"

## Filter Driers



- 100676** 2, 2-1/2 & 3T Liquid Line
- 100677** 3/4" OD Suction Line
- 100678** 7/8" OD Suction Line
- 100679** Service Valve Insert
- 100680** 3/8" Liquid Line f/Heat Pumps


## Adaptrap



Prevents afterdrip when burner stops & drooling of oil during the "off" period, eliminates erratic spray and flame flutter on burner shut-off due to air in the oil line. Pipe size 1/8", 1-3/8" long.

**238323**

## Ignitions Transformers



- 238342** Back Hinge, Wayne
- 238344** Beckett
- 238348** Side, Wayne
- 238345** 519914

## Delavan® Nozzles



A = Hollow  
S&B = Solid  
W = Semi-Solid

- 238324** 50-80A; 12/Ctn.
- 238326** 60-80A; 12/Ctn.
- 238327** 55-90W; 12/Ctn.
- 238328** 60-80W; 12/Ctn.
- 238330** 65-90A; 12/Ctn.
- 238332** 50-90A; 12/Ctn.
- 238334** 60-90A; 12/Ctn.
- 238336** 65-80-A; 12/Ctn.

## TANK TUB

**NEW!**

### Oil Storage Solution

Available in **THREE** colors to compliment today's home styles.



*Say goodbye to this unsightly mess....*



Cover can always be lifted to check tank gauge after installing external fill and vent.



*Safe, Attractive and Affordable!*

- 203600** White
- 203601** Two-Tone Beige
- 203602** Gray

- UL Listed
- Meets and exceeds NFPA requirements for 110% containment
- Designed for both 275 and 330 gallon storage tanks
- Extends life of oil tank and prevents oil line freeze-ups
- 2-piece construction for easy installation
- 12 year warranty

*Forget worries about spills, leaks, freezing, gelling or condensation!*


Prices and Specifications Subject to Change without Notice

# PolyVulc

## The Black Pad® AC Pad

- Strong
- Lightweight
- Breakage-free
- Environmentally friendly

100%  
Recycled  
Rubber &  
Plastic

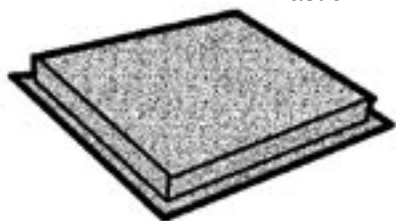

Stronger than concrete, lightweight and easy to handle. Made of recycled tires, so they're strong and breakage-free. No breakage makes them the economical choice.

- 100499** 30" x 30" x 2"
- 100500** 30" x 30" x 3"
- 100501** 36" x 36" x 3"
- 100502** 24" x 24" x 3"
- 100504** 24" x 24" x 2"
- 100503** 36" x 48" x 3"



- 100505** 24" x 24" x 2"
- 100507** 30" x 30" x 2"

## Ultralite™ Lightweight Equipment Pads




- Lightweight
- Break resistant
- Solid EPS bottom

Concrete pad at the weight of plastic (approx. 3 lbs. per sq. ft.). Impact and breakage resistant, strong and flexible. Weather resistant. Molded textured surface prevents unit slide and promotes moisture drainage. Will not support mold or fungus growth. Conforms to uneven ground conditions. Solid EPS bottom – larger bearing surface than hollow pads – resists settling.

- 100518** 30" x 30" x 2"

## Dura Grid Pad


- Lightweight
- Break resistant
- Self-leveling
- One-piece construction



Looks like concrete even close up. Molded, high-density polyethylene is light-weight, easy to transport and install. Self-leveling due to a unique grid pattern of support ribs molded into pad. Won't crack, break, delaminate or crumble even under extreme conditions.

- 100509** 36" x 36" x 2"
- 100510** 36" x 48" x 2"


## Miller Unit A/C Cover

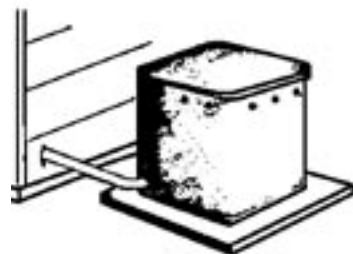

Vented to provide positive condensation relief and to prevent control damaging moisture from building up under the cover. For Miller units.

- 203503** S3QA INT #9

## Bramec Pump-Up Heat Pump Stand

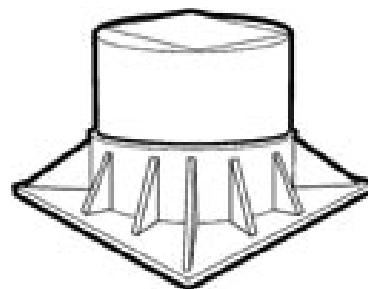

Corrosion-resistant plastic for use indoor or outdoors. Includes polymeric mastic to help prevent "walking," aid in leveling and absorb vibration and noise.

- 100525** 3"
- 100526** 6"
- 100527** 6" Black Cone

**NEW!**



## K-44